


Start Here - Marine Series Pro Lighting Quick Setup Guide

1


Part Identification

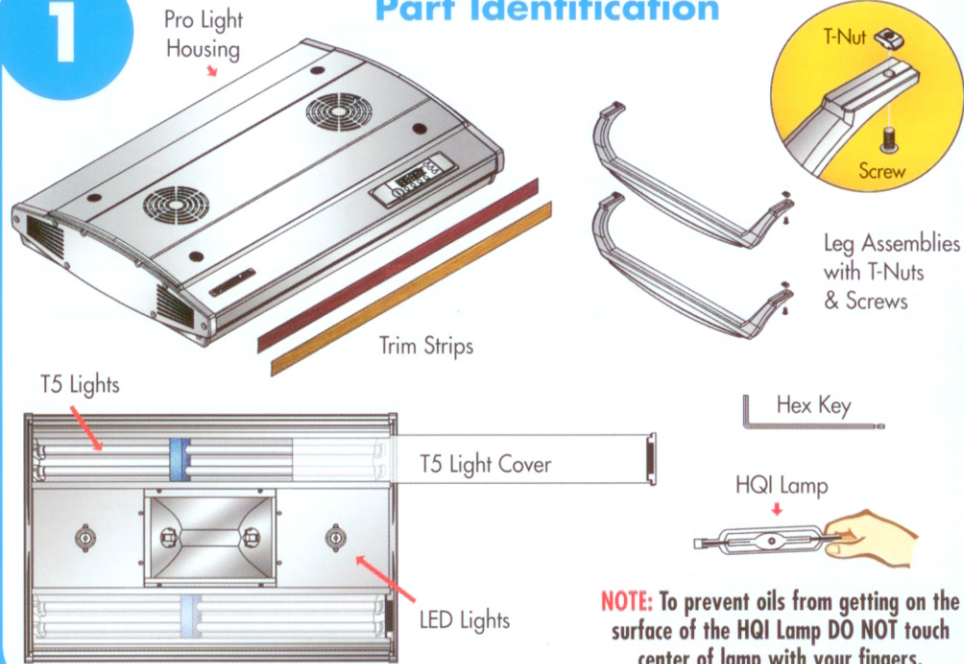

2


Remove All Protective Packing

NOTE: Before operation all protective packing must be removed and discarded.

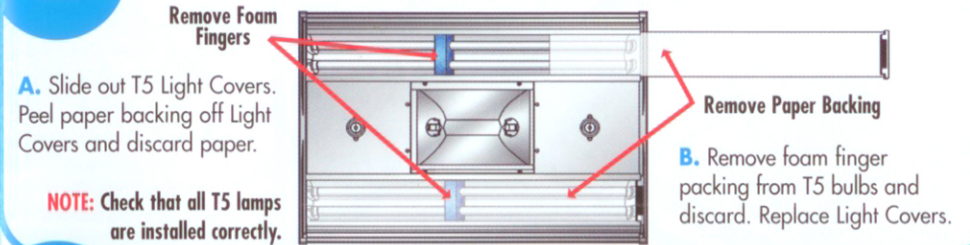


3

Install HQI Lamp/s

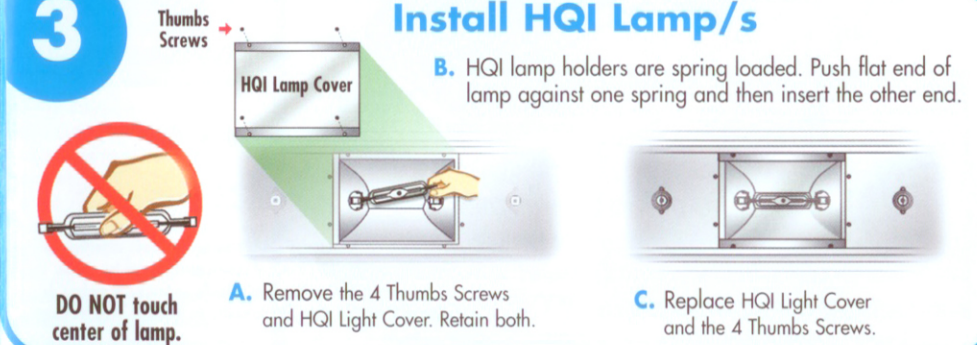

4

Install Leg Assemblies

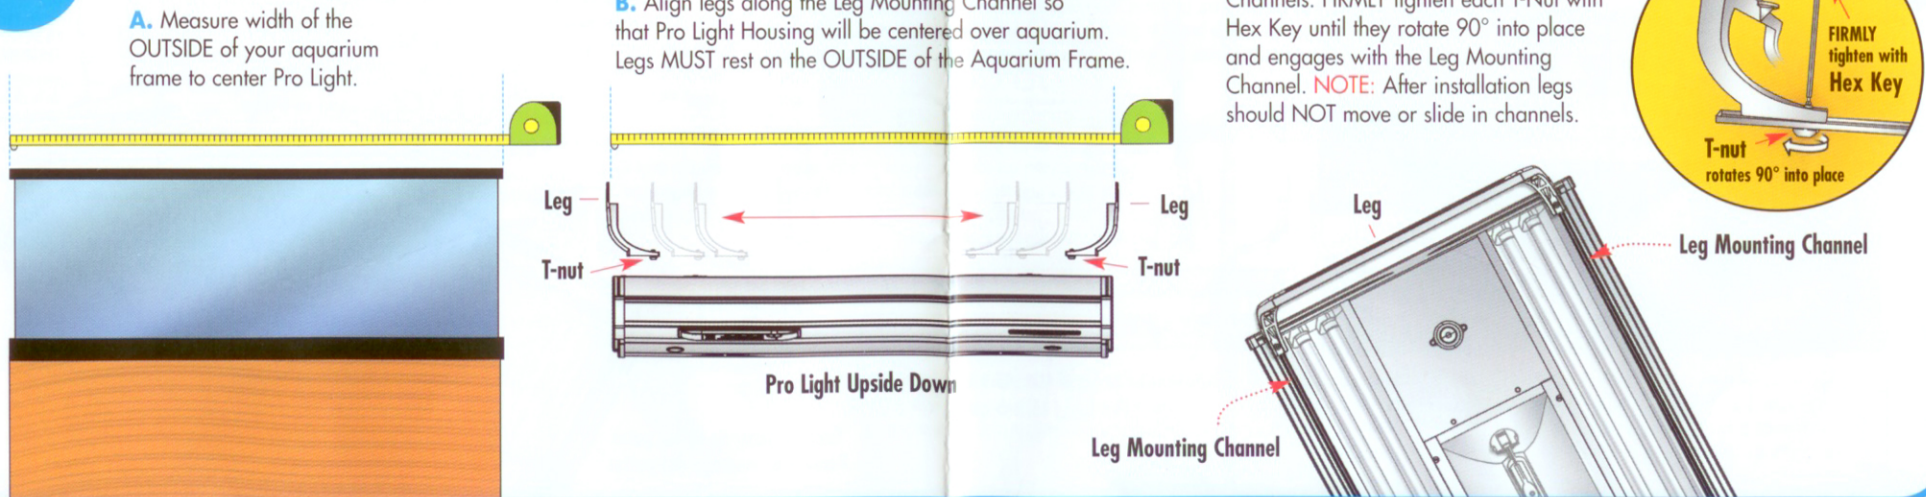

5


Aquarium Mount Installation

A. Light Housing MUST be centered over Aquarium. Check positioning. With help of another person place light on top of aquarium.



6

Add Trim Strip

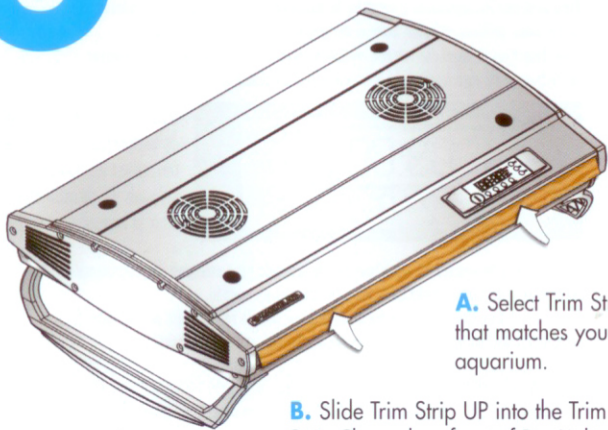


C. Next push Trim Strip back into Channel and release. To remove Trim Strip slide UP and pull OUT of the Channel.

7

Set Clock and Light Timers

NOTE: Pro Light will not function until clock is set.

A. Plug Pro Light in. Leave a drip loop for safety.



NOTE: Drip Loop (for safety)

B. Set Clock

- 1) Set clock to current time, this will be the reference time for all the Light Timers.
- 2) If the display Icon (dot) is not next to the Clock mode press either HR, MIN or MODE button until it is.



Set Clock to current time

- 3) Press and hold SET button (about 2 seconds) until all digits blink.
- 4) Press the HR button to set the present hour.
- 5) Press the MIN button to set the present minute.
- 6) Go to step 8 or press MODE button once to set display style to 12Hr or 24Hr time display.
- 7) Press HR or MIN to toggle between the 12Hr or 24Hr display style.
- 8) Press SET button to confirm and leave Clock mode.

C. Set Light Timers

- 1) Continue to press the MODE button until the Icon (dot) is on the light timer (HQI, T5 or LED) that you want to set.
- 2) Press and hold the SET button until all digits blink.
- 3) Press the HR button to set the ON hour and MIN button to set the ON minute then press the SET button.

Recommended Light Timing for (Reef Aquariums)

T5 Lights: Come on first by themselves for 15 - 30 minutes in the morning.

HQI Light: Come on next for 8 - 10 hours depending on coral. The T5 Lights should also remain on for 8 - 10 hours with the HQI Light.

T5 Lights: Also need to remain on 15 - 30 minutes after the HQI light turns off.

LED Lights: Turn on 1 - 2 minutes before The T5 Lights shut down. And turn off 1 to 2 minutes after the T5 Lights come on in the morning.



On HQI light timer Setting

- 4) Press Mode to SET the OFF HR and MIN for that same Light Timer.
- 5) Press the HR button to set the OFF hour and MIN button to set the OFF minute then press the SET button.
- 6) Press Mode to continue setting the On Off T5 and LED Light Timers repeating steps 1-5.



OFF HQI light timer Setting

- 7) To deactivate a light, set the OFF time equal to ON time.

D. Override Light Timer

To override the light timer mode sequence press the desired manual light timer button.



Override manual light timer buttons

NOTE: Clock/timer has a backup battery to maintain clock time and light timer settings in the event of power outage.